

Smart
connections.

Data sheet

PIKO 4.2

4.2

Technical data PIKO 4.2



- 3-phase feed-in
- Transformerless converting
- Integrated electronic DC switch
- Broad input voltage range
- Standard integrated communication package with data logger, web server, solar portal and the following interfaces: 2x Ethernet, RS485, S0, 4x analogue inputs (e.g. for ripple control receivers or PIKO Sensor)
- PIKO BA Sensor can be connected for the measurement of building consumption and for dynamic active power control
- Integrated switch contact for self-consumption optimisation
- Smart Home-ready, EEBus 1.0-ready

Input side (DC)

Max. PV power (cos φ = 1)	kWp	4.6
Rated input voltage (U _{DC,r})	V	680
Max. input voltage (U _{DCmax})	V	1000
Min. input voltage (U _{DCmin})	V	160
Start-up input voltage (U _{DCstart})	V	180
Max. MPP voltage (U _{MPPmax})	V	800
Min. MPP voltage for DC rated output in single tracker mode (U _{MPPmin})	V	400
Min. MPP voltage for DC rated output in two-tracker mode (U _{MPPmin})	V	-
Max. input current (I _{DCmax})	A	11
Max. input current with parallel connection	A	-
Number of DC inputs		1
Number of independent MPP trackers		1

Output side (AC)

Rated output, cos φ = 1 (P _{AC,r})	kW	4.2
Max. output apparent power, cos φ, adj	kVA	4.2
Max. output voltage (U _{ACmax})	V	264.5
Min. output voltage (U _{ACmin})	V	184
Rated output current	A	6.1
Max. output current (I _{ACmax})	A	6.1
Short-circuit current (peak / RMS)	A	9.5 / 6.7
Grid connection		3/N/PE, AC, 400V
Rated frequency (f _r)	Hz	50
Max. grid frequency (f _{max})	Hz	51.5
Min. grid frequency (f _{min})	Hz	47.5
Setting range of the power factor cos φ _{AC,r}		0.80...1...0.80
Power factor for rated power (cos φ _{AC,r})		1
Max. total harmonic distortion	%	3

Device properties

Max. total night-time consumption (own requirements standby)	W	1.8
Max. night-time consumption of communication board	W	1.7

Efficiency

Max. efficiency	%	97.5
European efficiency	%	96.1
MPP adjustment efficiency	%	99.9

Warranty

Warranty (years)		5
Warranty extension optional (years)		10/20


System data

Topology: Without galvanic separation - transformerless		✓
Internal protection according to IEC 60529		IP 55
Protective class according to IEC 62103		I
Overvoltage category according to IEC 60664-1 Input side (PV generator)		II
Overvoltage category according to IEC 60664-1 Output side (grid connection)		III
Degree of contamination		3
Environmental category (outdoor installation)		✓
Environmental category (interior installation)		✓
UV resistance		✓
Minimum cable cross-section of AC connecting line	mm ²	1,5
Minimum cable cross-section of DC connecting line	mm ²	4
Max. fusing on output side		B16, C16
Operator protection (EN 62109-2)		RCCB Typ B
Electronic disconnection device integrated		✓
Height	mm	385 (15.16 in)
Width	mm	500 (19.69 in)
Depth	mm	236 (9.29 in)
Weight	kg	24 (52.91 lb)
Cooling principle - convection		-
Cooling principle - regulated fans		✓
Max. air throughput	m ³ /h	-
Noise emission	dBA	43
Ambient temperature	°C	-20...60 (-4...140 °F)
Max. installation altitude above sea level	m	2000 (6562 ft)
Relative humidity	%	4...100
Connection technology at input side - MC 4		✓
Connection technology at output side - spring-loaded terminal strip		✓

Interfaces

Ethernet RJ45		2
RS485		1
S0		1
Analogue inputs		4
PIKO BA Sensor Interface		1

Efficiency characteristics of PIKO 4.2

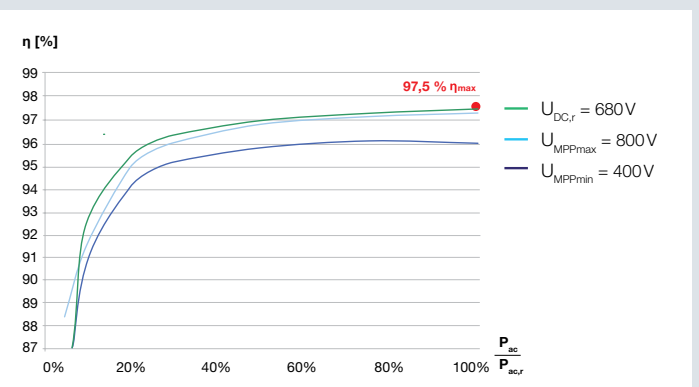

Smart connections.

Contact

KOSTAL Solar Electric GmbH
 Hanferstr. 6
 79108 Freiburg i. Br.
 Germany
 Tel. +49 761 477 44 - 100
 Fax +49 761 477 44 - 111
 www.kostal-solar-electric.com