

## AXIbipremium XXL HC MW 530 - 555 Wp

High performance bifacial solar module  
144 halfcell, monocrystalline



German-American-Engineering


### The advantages:

- 15** Years 15 years Manufacturer's warranty
- HC** High module performance through Half-Cut-technology and selected materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 100%** 100% visual electroluminescence inspection in production
- Frame** High stability due to innovative frame design
- IP 68** High quality junction box and connector systems
- 25** Years 25 years Performance guarantee



Fig. similar 144MHUSA230801A

### Exclusive linear AXITEC high performance guarantee!

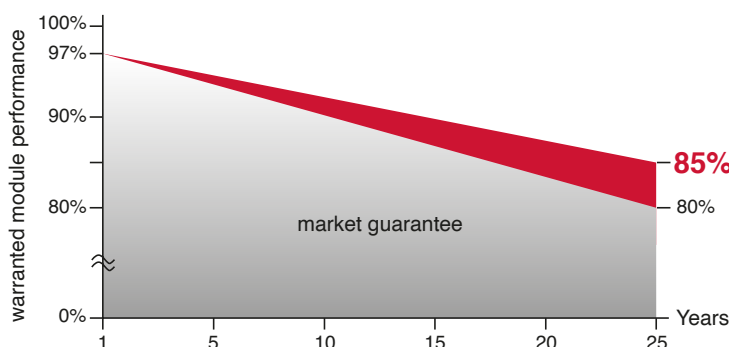

**85% AXITEC Warranty Added Value: up to 5% more power after 25 years**



Conforms to ETL STD No.1703  
Certified to ULC/ORD Std. C1703

## AXIbipremium XXL HC MW 530 - 555 Wp

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>. spectrum AM 1.5 at a cell temperature of 25°C)

Type	AC-530MBT/144V	AC-535MBT/144V	AC-540MBT/144V	AC-545MBT/144V	AC-550MBT/144V	AC-555MBT/144V
Nominal output	<b>530 Wp</b>	<b>535 Wp</b>	<b>540 Wp</b>	<b>545 Wp</b>	<b>550 Wp</b>	<b>555 Wp</b>
Nominal voltage U <sub>mpp</sub>	41.31 V	41.47 V	41.64 V	41.80 V	41.96 V	42.11 V
Nominal current I <sub>mpp</sub>	12.83 A	12.91 A	12.97 A	13.04 A	13.11 A	13.18 A
Short circuit current I <sub>sc</sub>	13.72 A	13.79 A	13.86 A	13.93 A	14.00 A	14.07 A
Open circuit voltag U <sub>oc</sub>	49.30 V	49.45 V	49.60 V	49.75 V	49.90 V	50.05 V
Module conversion efficiency	20.52 %	20.71 %	20.90 %	21.10 %	21.29 %	21.48 %

**Bifacial output - Backside Power gain**

<b>10% Power output</b>	583.00 Wp	588.50 Wp	594.00 Wp	599.50 Wp	605.00 Wp	610.50 Wp
Module Efficiency	22.57 %	22.78 %	22.99 %	23.21 %	23.41 %	23.62 %
<b>15% Power output</b>	609.50 Wp	615.25 Wp	621.00 Wp	626.75 Wp	632.50 Wp	638.25 Wp
Module Efficiency	23.59 %	23.82 %	24.04 %	24.26 %	24.47 %	24.70 %
<b>20% Power output</b>	636.00 Wp	642.00 Wp	648.00 Wp	654.00 Wp	660.00 Wp	666.00 Wp
Module Efficiency	24.62 %	24.85 %	25.08 %	25.32 %	25.54 %	25.77 %
<b>25% Power output</b>	662.50 Wp	668.75 Wp	675.00 Wp	681.25 Wp	687.50 Wp	693.75 Wp
Module Efficiency	25.65 %	25.89 %	26.13 %	26.37 %	26.60 %	26.84 %

**Design**

Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	144 monocrystalline high efficiency cells
Backside	Composite film, cell caps white
Frame	1.38 inch (35 mm) silver aluminium frame

**Mechanical data**

L x W x H	89.68 x 44.64 x 1.38 inch (2278 x 1134 x 35 mm)
Weight	61.73 lbs (28 kg) with frame

**Mechanical load**

Design load (pressure/suction)	33.3 PSF / 33.3 PSF
Test load (pressure/suction)	50 PSF / 50 PSF

**Power connection**

Socket	Protection Class IP68
Wire	51.18 inch, AWG 11
Plug-in system	Plug/socket IP68, Stäubli EVO2

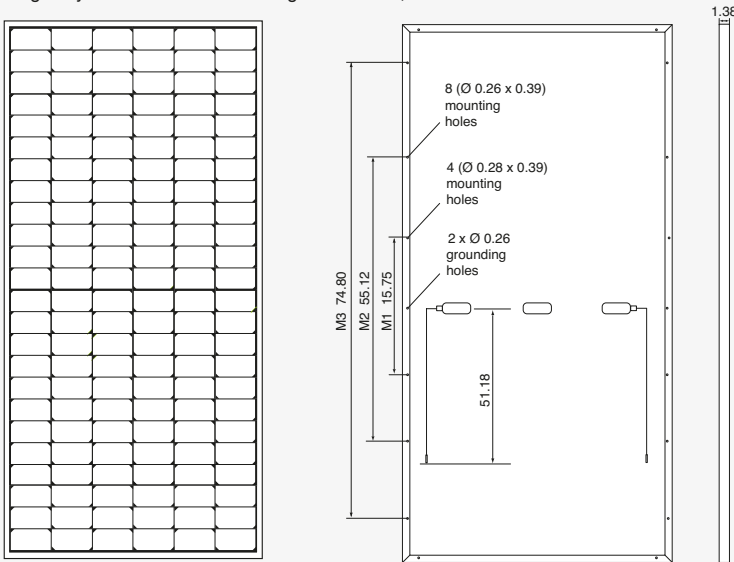


Fig. principle sketch

All dimensions in inch

**Limit values**

System voltage	1500 VDC (UL) 1000 VDC (IEC)
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	30.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
-----------------------------------	------------------------------

Bifaciality	70 % ± 10 %
-------------	-------------

(No external voltages greater than V<sub>o</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1.5; wind speed 1 m/s; Temperature 20°C

**Temperature coefficients**

Voltage U <sub>oc</sub>	-0.29 %/K
Current I <sub>sc</sub>	0.048 %/K
Output P <sub>mpp</sub>	-0.35 %/K

**Low-light performance** (Example for AC-555MH/144V)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	2.69 A	40.53 V
400 W/m <sup>2</sup>	5.43 A	40.99 V
600 W/m <sup>2</sup>	8.12 A	41.31 V
800 W/m <sup>2</sup>	10.73 A	41.67 V
1000 W/m <sup>2</sup>	13.18 A	42.11 V

**Packaging**

Module pieces per pallet	31
Module pieces per HC-container	620